



# MADE IN CHINA

## Electrical Characteristics

Module Type	SRP-375-BMA SRP-375-BMA-HV	SRP-380-BMA SRP-380-BMA-HV	SRP-385-BMA SRP-385-BMA-HV	SRP-390-BMA SRP-390-BMA-HV
	STC	STC	STC	STC
Maximum Power at STC (Pmp)	375	380	385	390
Open Circuit Voltage (Voc)	48.1	48.3	48.5	48.7
Short Circuit Current (Isc)	9.70	9.80	9.87	9.95
Maximum Power Voltage (Vmp)	40.5	40.8	41.0	41.2
Maximum Power Current (Imp)	9.26	9.32	9.39	9.47
Module Efficiency at STC(ηm)	18.94	19.19	19.44	19.70
Power Tolerance	(0,+4.99)			
Maximum System Voltage	1000 VDC / 1500 VDC			
Maximum Series Fuse Rating	20A			

STC: Irradiance 1000 W/m<sup>2</sup> module temperature 25°C AM=1.5.

Power measurement tolerance: +/-3%; Voltage measurement tolerance: +/-2%; Current measurement tolerance: +/-4%

## Temperature Characteristics

Pmax Temperature Coefficient	-0.38 %/°C
Voc Temperature Coefficient	-0.28 %/°C
Isc Temperature Coefficient	+0.05 %/°C
Operating Temperature	-40 ~ +85 °C
Nominal Operating Cell Temperature (NOCT)	45±2 °C


## Mechanical Specifications

External Dimensions	1996 x 992 x 40 mm
Weight	22.5kg
Solar Cells	Mono crystalline 156.75 x 78.375mm (144pcs)
Front Glass	3.2 mm AR coating tempered glass, low iron
Frame	Anodized aluminium alloy
Junction Box	IP68, 3 diodes
Output Cables	4.0 mm <sup>2</sup> , Portrait:255mm(+)/355mm(-); Landscape:1200mm
Mechanical Load	5400 Pa
Connector	TT02&PV-KST4xy-UR;PV-KBT4/xy-UR for SD-903

## Packing Configuration

	1996 x 992 x 40 mm		
Container	20'GP	40'GP	40'HQ
Pieces per Pallet	27	27	27+2*
Pallets per Container	10	22	22
Pieces per Container	270	594	638

\* 27+2 pieces per pallet is the special package which only suits for container transport.  
 For details, please consult SERAPHIM.

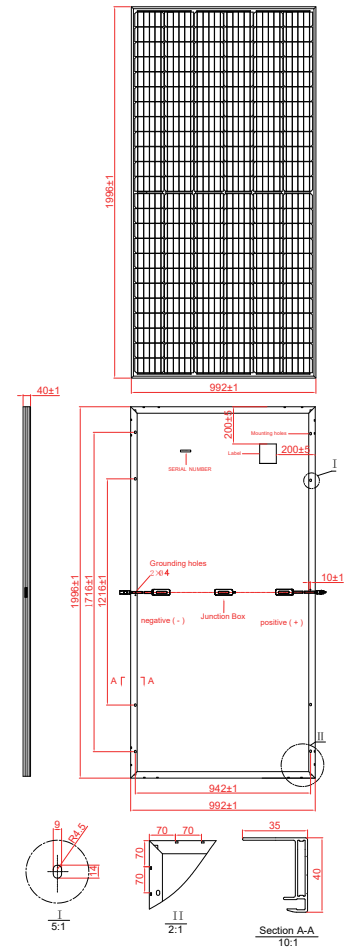

## I-V Curve

