

UNO-2.0-I UNO-2.5-I

GENERAL SPECIFICATIONS OUTDOOR MODELS

The UNO-2.0-I and UNO-2.5-I are the latest single phase string inverters in the Aurora range. A new-look inverter but packed with Power-One's proven high performing technology. The new look inverter has new features including a special built-in heat sink compartment and front panel display system.

The smallest of Power-One's outdoor range, these new products are the right size for the average rooftop installation. This rugged outdoor inverter has been designed as a completely sealed unit to withstand the harshest environmental conditions.

The high speed MPPT offers real-time power tracking and improved energy harvesting.


Despite the isolated operation, the UNO-2.0-I and UNO-2.5-I feature an efficiency of 96.3%. The wide input voltage range makes the inverter suitable to low power installations with reduced string size.



Features


- Each inverter is set on specific grid codes which can be selected in the field
- Single phase output
- Wide input range
- High speed and precise MPPT algorithm for real time power tracking and improved energy harvesting
- Flat efficiency curves ensure high efficiency at all output levels ensuring consistent and stable performance across the entire input voltage and output power range
- Outdoor enclosure for unrestricted use under any environmental conditions
- RS-485 communication interface (for connection to laptop or datalogger)
- Compatible with PVI-RADIOMODULE for wireless communication with Aurora PVI-DESKTOP

BLOCK DIAGRAM OF UNO-2.0-I AND UNO-2.5-I

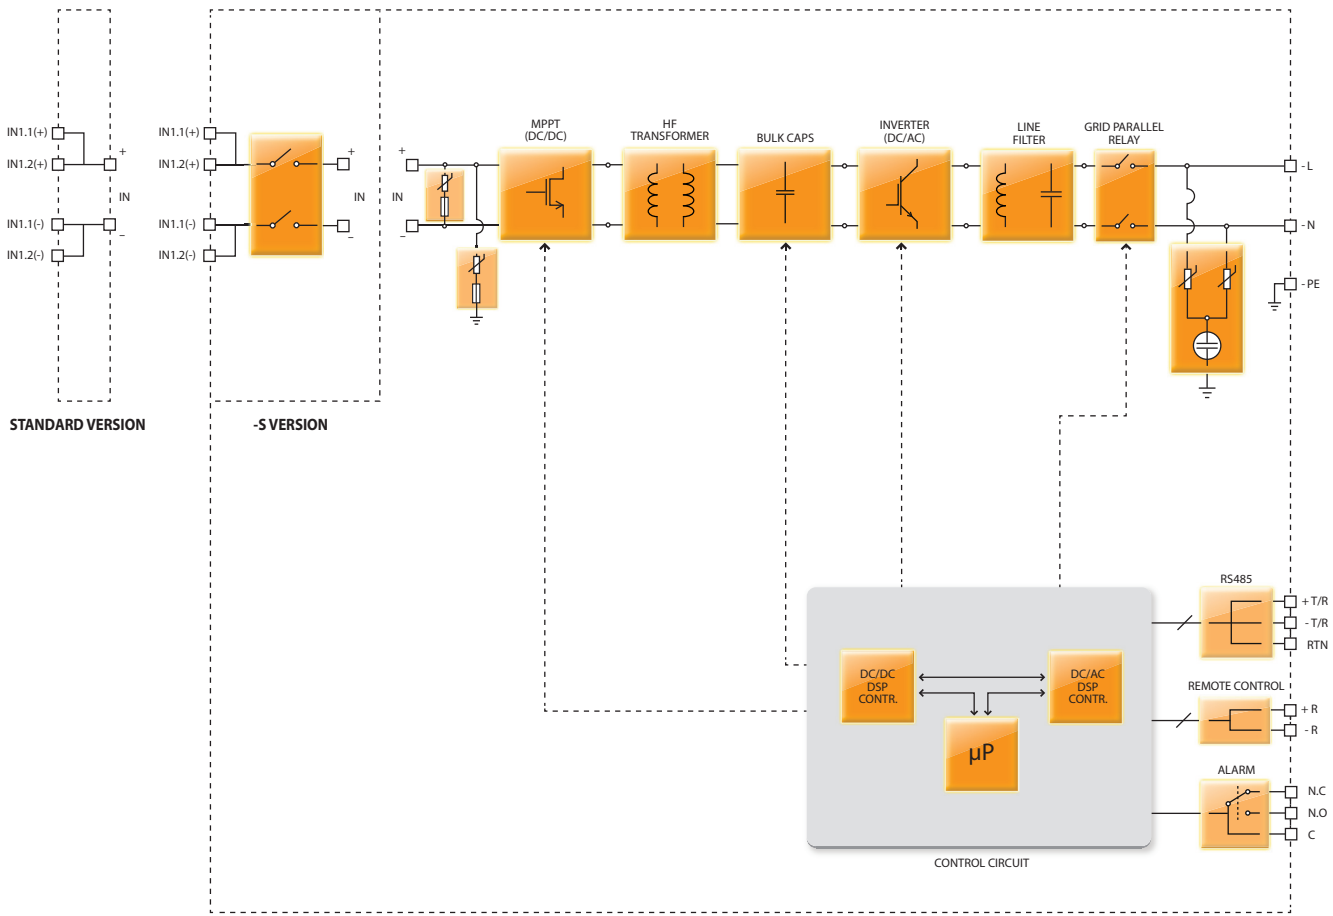


Block Diagram and Efficiency Curves

UNO-2.0-I-OUTD

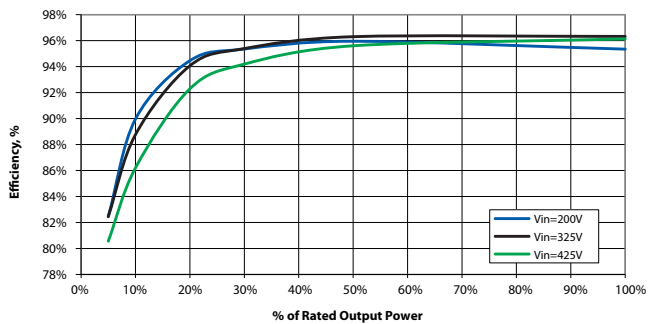

UNO-2.5-I-OUTD

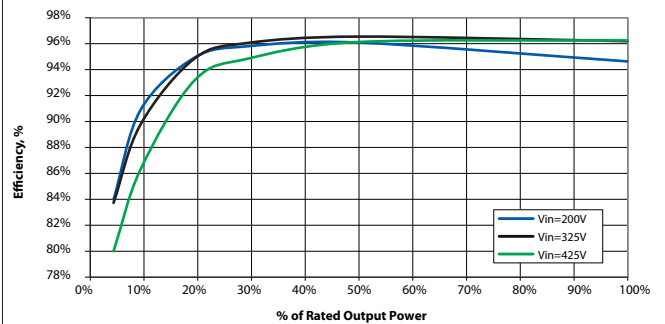

PARAMETER	UNO-2.0-I-OUTD	UNO-2.5-I-OUTD
Input Side		
Absolute Maximum DC Input Voltage ($V_{max,abs}$)	520 V	520 V
Start-up DC Input Voltage (V_{start})	200 V (adj. 120...350 V)	200 V (adj. 120...350 V)
Operating DC Input Voltage Range ($V_{dcmin} \dots V_{dcmax}$)	$0.7 \times V_{start} \dots 520 V$	$0.7 \times V_{start} \dots 520 V$
Rated DC Input Power (P_{dcr})	2100 W	2600 W
Number of Independent MPPT	1	1
Maximum DC Input Power for each MPPT ($P_{MPPTmax}$)	2300 W Linear Derating From MAX to Null [470V ≤ V_{MPPT} ≤ 520V]	2900 W Linear Derating From MAX to Null [470V ≤ V_{MPPT} ≤ 520V]
MPPT Input DC Voltage Range ($V_{MPPTmin} \dots V_{MPPTmax}$) at P_{acr}	170...470 V	205...470 V
DC Power Limitation for each MPPT with Independent Configuration of MPPT at P_{acr} , max unbalance example	not applicable	not applicable
Maximum DC Input Current (I_{dcmax}) / for each MPPT ($I_{MPPTmax}$)	12.5 A / 12.5 A	12.8 A / 12.8 A
Maximum Input Short Circuit Current for each MPPT	15.0 A	15.0 A
Number of DC Inputs Pairs for each MPPT	2	2
DC Connection Type	Tool Free PV Connector WM / MC4	Tool Free PV Connector WM / MC4
Input Protection		
Reverse Polarity protection	Yes, from limited current source	Yes, from limited current source
Input Over Voltage Protection for each MPPT - Varistor	2	2
Photovoltaic Array Isolation Control	According to local standard	According to local standard
DC Switch Rating for each MPPT (Version with DC switch)	16 A / 600 V	16 A / 600 V
Output Side		
AC Grid Connection Type	Single phase	Single phase
Rated AC Power (P_{acr})	2000 W	2500 W
Maximum AC Output Power (P_{acmax})	2200 W ⁽⁴⁾	2750 W ⁽⁵⁾
Rated AC Grid Voltage (V_{acr})	230 V	230 V
AC Voltage Range	180...264 V ⁽¹⁾	180...264 V ⁽¹⁾
Maximum AC Output Current ($I_{ac,max}$)	10.0 A	12.0 A
Rated Output Frequency (f_r)	50 Hz	50 Hz
Output Frequency Range ($f_{min} \dots f_{max}$)	47...53 Hz ⁽²⁾	47...53 Hz ⁽²⁾
Nominal Power Factor ($\cos\phi_{i,acr}$)	> 0.990	> 0.990
Total Current Harmonic Distortion	< 2%	< 2%
AC Connection Type	Screw terminal block	Screw terminal block
Output Protection		
Anti-Islanding Protection	According to local standard	According to local standard
Maximum AC Overcurrent Protection	15.0 A	15.0 A
Output Overvoltage Protection - Varistor	2 (L - N / L - PE)	2 (L - N / L - PE)
Operating Performance		
Maximum Efficiency (η_{max})	96.3%	96.3%
Weighted Efficiency (EURO/CEC)	95.1% / -	95.4% / -
Feed In Power Threshold	24.0 W	24.0 W
Stand-by Consumption	< 8.0 W ⁽³⁾	< 8.0 W ⁽³⁾
Communication		
Wired Local Monitoring	PVI-USB-RS232_485 (opt.), PVI-DESKTOP (opt.)	PVI-USB-RS232_485 (opt.), PVI-DESKTOP (opt.)
Remote Monitoring	PVI-AEC-EVO (opt.), AURORA-UNIVERSAL (opt.)	PVI-AEC-EVO (opt.), AURORA-UNIVERSAL (opt.)
Wireless Local Monitoring	PVI-DESKTOP (opt.) with PVI-RADIOMODULE (opt.)	PVI-DESKTOP (opt.) with PVI-RADIOMODULE (opt.)
User Interface	Graphic display	Graphic display
Environmental		
Ambient Temperature Range	-25...+60°C (-13...+ 140°F) with derating above 45°C (113°F)	
Relative Humidity	0...100 % condensing	0...100 % condensing
Noise Emission	< 50 dB(A) @ 1 m	< 50 dB(A) @ 1 m
Maximum Operating Altitude without Derating	2000 m / 6560 ft	2000 m / 6560 ft
Physical		
Environmental Protection Rating	IP 65	IP 65
Cooling	Natural	Natural
Dimension (H x W x D)	518mm x 367mm x 161mm / 20.4" x 14.4" x 6.3"	518mm x 367mm x 161mm / 20.4" x 14.4" x 6.3"
Weight	< 17 kg / 37.4 lb	< 17 kg / 37.4 lb
Mounting System	Wall bracket	Wall bracket
Safety		
Isolation Level	HF transformer	HF transformer
Marking	CE	CE
Safety and EMC Standard	EN 50178, AS/NZS3100, AS/NZS 60950, EN61000-6-1, EN61000-6-3, EN61000-3-11, EN61000-3-12	EN 50178, AS/NZS3100, AS/NZS 60950, EN61000-6-1, EN61000-6-3, EN61000-3-11, EN61000-3-12
Grid Standard	Enel Guideline (CEI 0-21 + Attachment A70 Terna) ⁽⁶⁾ , VDE 0126-1-1, VDE-AR-N 4105 ⁽⁷⁾ , G83/1, EN 50438, RD1663, AS 4777	Enel Guideline (CEI 0-21 + Attachment A70 Terna) ⁽⁶⁾ , VDE 0126-1-1, VDE-AR-N 4105 ⁽⁷⁾ , G83/1, EN 50438, RD1663, AS 4777
Available Products Variants		
Standard	UNO-2.0-I-OUTD	UNO-2.5-I-OUTD
With DC Switch	UNO-2.0-I-OUTD-S	UNO-2.5-I-OUTD-S

- The AC voltage range may vary depending on specific country grid standard
- The Frequency range may vary depending on specific country grid standard
- Night time consumption < 0.6W
- Limited to 2000 W for Germany
- Limited to 2500 W for Germany
- Since their applicability dates, limited to plant power ≤ 3kW
- Limited to plant power ≤ 3.68 kVA

Remark. Features not specifically listed in the present data sheet are not included in the product



www.power-one.com

Power-One Renewable Energy Worldwide Sales Offices

<u>Country</u>	<u>Name/Region</u>	<u>Telephone</u>	<u>Email</u>
Australia	Asia Pacific	+61 2 9735 3111	sales.australia@power-one.com
China (Shenzhen)	Asia Pacific	+86 755 2988 5888	sales.china@power-one.com
China (Shanghai)	Asia Pacific	+86 21 5505 6907	sales.china@power-one.com
India	Asia Pacific	+65 6896 3363	sales.india@power-one.com
Singapore	Asia Pacific	+65 6896 3363	sales.singapore@power-one.com
Belgium / The Netherlands / Luxembourg	Europe	+32 2 206 0338	sales.belgium@power-one.com
France	Europe	+33 (0) 141 796 140	sales.france@power-one.com
Germany	Europe	+49 7641 955 2020	sales.germany@power-one.com
Italy	Europe	00 800 00287672 Opt. n°5	sales.italy@power-one.com
Spain	Europe	+34 91 879 88 54	sales.spain@power-one.com
United Kingdom	Europe	+44 1903 823 323	sales.UK@power-one.com
Dubai	Middle East	+971 50 100 4142	sales.dubai@power-one.com
Canada	North America	+1 877 261-1374	sales.canada@power-one.com
USA East	North America	+1 877 261-1374	sales.usaeast@power-one.com
USA Central	North America	+1 877 261-1374	sales.usacentral@power-one.com
USA West	North America	+1 877 261-1374	sales.usawest@power-one.com